Talking Pen Holder User Manual

Item: TPH-01

1. Function

1. Time display

Hour, minute, month, day (from 2000 to 2009), week, and could change between 12 and 24 hour system.

2. Music alarm clock and snooze function

Could set daily alarm time, different music are selectable, the interval time of snooze are also adjustable.

3. **Timer mode**: reverse timer, timer range from 23:59:59 to 00:00:00 hours.
4. **temperature mode**: change from ℃ to ℉, measuring scope: 0-50℃ (32℉-122℉), the accuracy up to 0.5℃
5. **Color light mode**: LCD screen have backlight, columns in two sides have circular lighting function

2. Operation:

1. Power on, enter “normal time mode”, time display is AM 12:00 in the 12-hour system.
2. Under the normal state, set time, date by pressing “SET” button, synchronized, week will also be changed.
3. Under the normal state, set “alarm clock” by pressing “MODE” button, turn on /off alarm clock and snooze function by ADJ

button.

4. Under Alarm clock state, set alarm clock time by pressing “SET”, the snooze interval time could be set from 1 to 60 minutes.
5. Under any state, enter “timer mode” by pressing , then could set reverse time. The clock will alarm when the time is on.
6. Under the non-setting state, ℃ to ℉ could be transferred by pressing C/F button.

3. Operation instruction

1. Time setting

Under the normal state, enter the setting of time, date by pressing “SET” button, then set hour, minute, year, month, day according to the following order: and finish the final setting with the help of the ADJ up button and C/F down button.

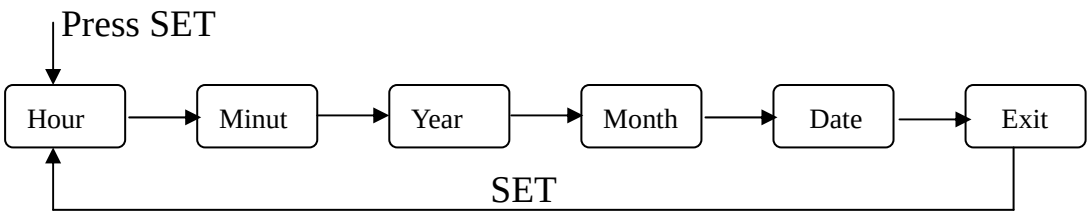

2. 12/24 hour system transferred

Under the normal state, transfer between 12 and 24 hour system by pressing 12/24(ADJ) button.

3. Alarm clock time setting

Under the normal state, enter into alarm clock mode by pressing

“Mode” button; under the alarm clock state, enter to set the alarm clock and snooze by pressing SET button, and set hour, minute, snooze interval time, alarm music etc. in the following order, and finish its setting with the help of ADJ button.

Note:

1) Under setting mode, exit by pressing MODE button or no button for one minute, and display the current setting time.
2) Under alarming clock state, turn on alarm and snooze function by ADJ button. “SNZ” is the symbol of snooze function, “ ” is the symbol of alarm clock.
3) When the set alarming time is on, the alarms lasts for one minute, but when snooze interval time is on, it alarms twice, and also for 1 minute. The alarming voice could be cancelled by pressing “SET” button or stopped by pressing any other button.
4) The interval time scope is: 1---60 minutes. Chose 8 songs in sequence from the last number displayed by “DATE “.
5) When the alarming and snooze symbol are all turned off, it won’t alarm even the set time is on; also, there is no snooze function only if symbol of alarm clock is displayed; The snooze function will be activated only both of the symbol of alarm clock and snooze are displayed.

4. Timer Mode

Press to enter Timer Mode, the acquiescent time is 23:59:59. Under Timer mode, press SET to set the time according the following order : hour, minute, second , and finish the setting by the help of ADJ button.

Note:

(1) Under the state of SET, exit by pressing MODE or no pressing for 1 minute.

(2)After finishing the above setting, press to begin timing, the current setting seconds begin to decline. When display 0 second, the setting minute begin to decline, and also the hour begin to decline when minute is 0. When time is 00:00:00, it will alarm for 1 minute.(if the current state is , 00:00:00 in the screen will flash.)

(3) During timing, repeat pressing , timing will stop or repeat. If timing is stopped, press ADJ button to set 0.

5. Temperature Mode

Display the present environment temperature, press C/F button to transfer between ℃ to ℉, measuring scope: 0℃-50℃ (32℉-122 ℉), the accuracy up to 0.5℃.

6. Color light mode

Under the normal state, if the switch is “OFF” position, there is no

light; when the switch is pushed to ON/TR, LCD screen have backlight, and also the Colorful light in the crystal column.

4. **Noti**ce:

    1) Please don’t push LCD display
    2) Please reinstall the battery if there is no display when taking away the insulator.